


مئل روز روشنہ



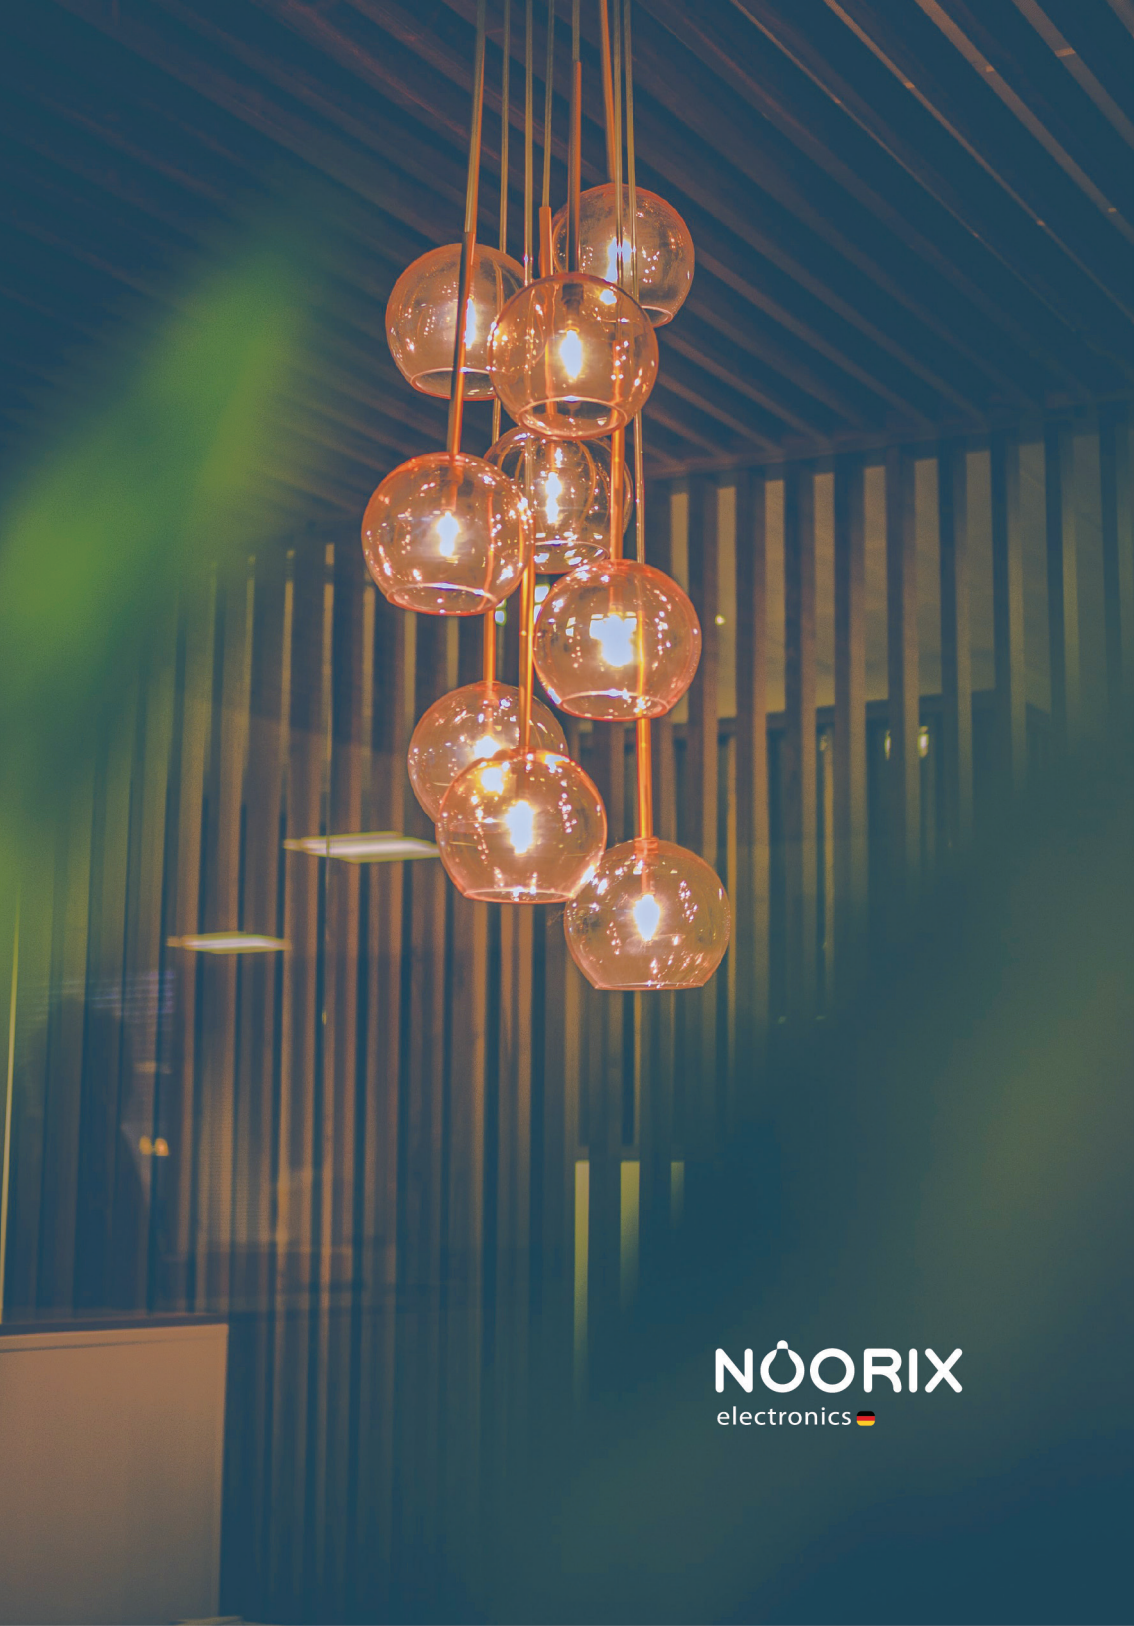


NOORIX
electronics 

NOORIX
electronics 

Noorix Company started its activity in the field of light and lighting equipment in 2021 with the investment of the private sector (special shares). Noorix is a young and dynamic group with the aim of conquering the peaks of technology and empowering the domestic production of the country powered by Listenzo, Germany. Also, Noorix group is a branch of Caspian Noor Electronics Industries, therefore it has a long history in the field of knowledge and up-to-date technology in industrial electronic components. The goal of Noorix is to support the optimization of the country's energy consumption, environmental protection, increase in domestic production and economic growth of the country by expanding light and lighting equipment. Noorix is always trying to provide the highest and best quality products to the market by using the knowledge of engineers and experts from the world's latest technology in the field of designing and developing lighting products. Products produced with the most advanced devices, which, in addition to high quality, have an affordable price. All the products of Noorix company have an unconditional guarantee. We are proud to do our best to produce products and provide quality services to satisfy you. We hope that with your support, dear people of Iran, we will take a solid step towards the empowerment, growth and development of the country

LED Candle Bulb



6w | 50 mA

LED Candle Light


life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color

-  Warm white
-  White
-  Natural White



LED Candle Bulb



7w | 50 mA

LED Candle Light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra > 80
photometric code	865/358

Light color



Warm white




White



Natural White



LED Candle Bulb






6w | 50 mA

LED Candle Light


life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color

-  Warm white
-  White
-  Natural White



LED Candle Light



7w | 50 mA


LED Candle Light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color




-  Warm white
-  White
-  Natural White





6W | 65 mA

G45 Lamp

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	 6500k /  4000k /  3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color



Warm white




White




Natural White


LED Bulb Series




10w | 65 mA



12w | 85 mA



15w | 110 mA



20w | 135 mA

NOORIX
electronics

LED Bulb Series

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra > 80
photometric code	865/358

Light color



Warm white



White



Natural White


LED Bulb Series




NOORIX
electronics 




High Power Series




20w | 140 mA



30w | 210 mA



40w | 270 mA



50w | 350 mA

High Power Series



life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 3000k
displacement coefficient	0.94
optical gain	Lm/W > 110
color rendering index	Ra>80
photometric code	865/358

Light color

 warm white

 white






80w | 520 mA

100w | 640 mA

High Power Series

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 3000k
displacement coefficient	0.94
optical gain	Lm/W > 110
color rendering index	Ra > 80
photometric code	865/358

Light color




High Power Series





NÖORIX
electronics 

NÖORIX
electronics 

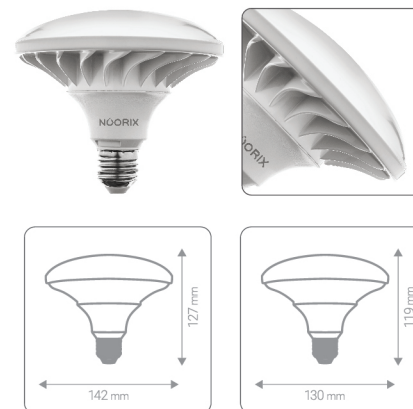

40w | 50 mA

30w | 50 mA

LED UFO Light

life span	30,000 h
frequency	50 Hz
angle of radiation	180°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.8
optical gain	Lm/w > 105
color rendering index	Ra>80
photometric code	865/358


Light color



LEDUFOLight



NOORIX
electronics 



7w | GU10

Halogen

life span	25,000 h
frequency	50 Hz
angle of radiation	48°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.8
optical gain	Lm/w > 100
color rendering index	Ra>80
photometric code	865/358

Light color



Warm white



White



Natural White

Halogen





7w | Mr16

Halogen

Halogen

life span	25,000 h
frequency	50 Hz
angle of radiation	48°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.8
optical gain	Lm/w > 100
color rendering index	Ra>80
photometric code	865/558

Light color



Warm white





White



Natural White



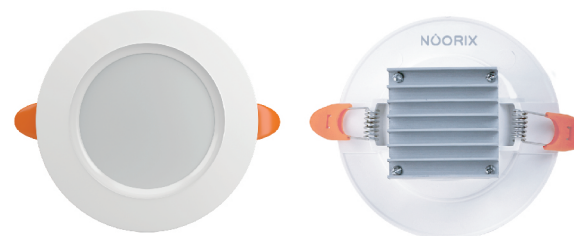

10w | 70 mA

Panel Light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color



Warm white



White





Natural White

Panel Light




NOORIX
electronics


SUPER LUMEN
سایز شو

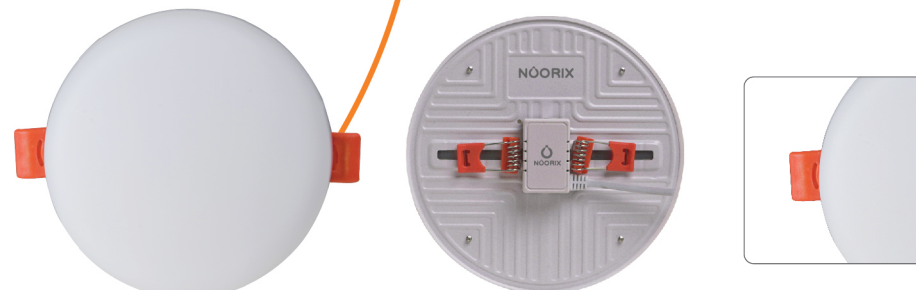


10w



15w



25w



35w

Frameless Series

life span	30,000 h
frequency	50 Hz
angle of radiation	180°
nominal color	100 mm
displacement coefficient	● 6500k / ● 4000k / ● 3000k
optical gain	Lm/W > 105
color rendering index	-20°C / +40°C
photometric code	> 0.6

Light color




Warm white



White



Natural White

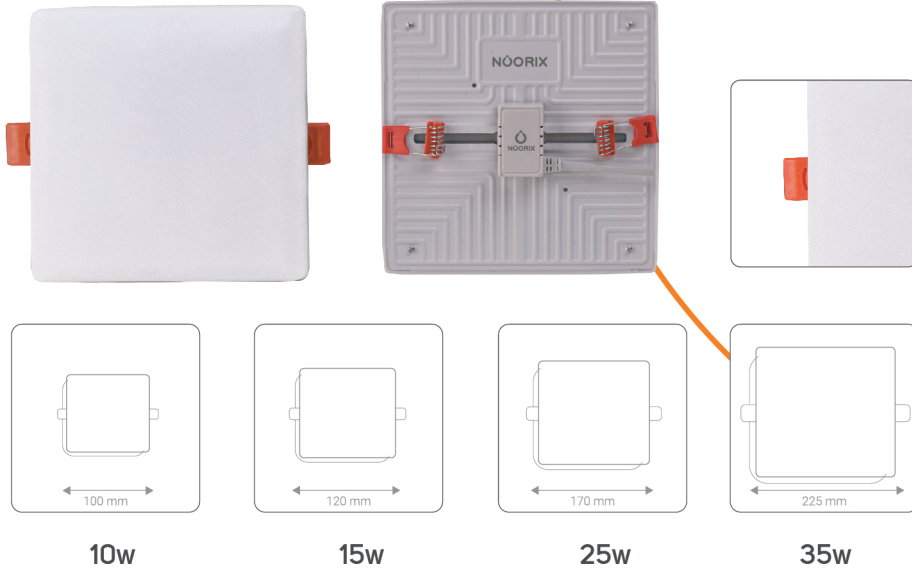

Frameless Series


Frameless Series

life span	30,000 h
frequency	50 Hz
angle of radiation	180°
nominal color	100 mm
displacement coefficient	● 6500k / ● 4000k / ● 3000k
optical gain	Lm/W > 105
color rendering index	-20°C / +40°C
photometric code	> 0.6


Light color

-  Warm white
-  White
-  Natural White







18w



25w



40w



50w


Frameless LED light

life span	30,000 h
frequency	50 Hz
angle of radiation	180°
nominal color	100 mm
displacement coefficient	● 6500k / ● 4000k / ● 3000k
optical gain	Lm/W > 105
color rendering index	-20°C / +40°C
photometric code	> 0.6


Light color




Frameless LED light

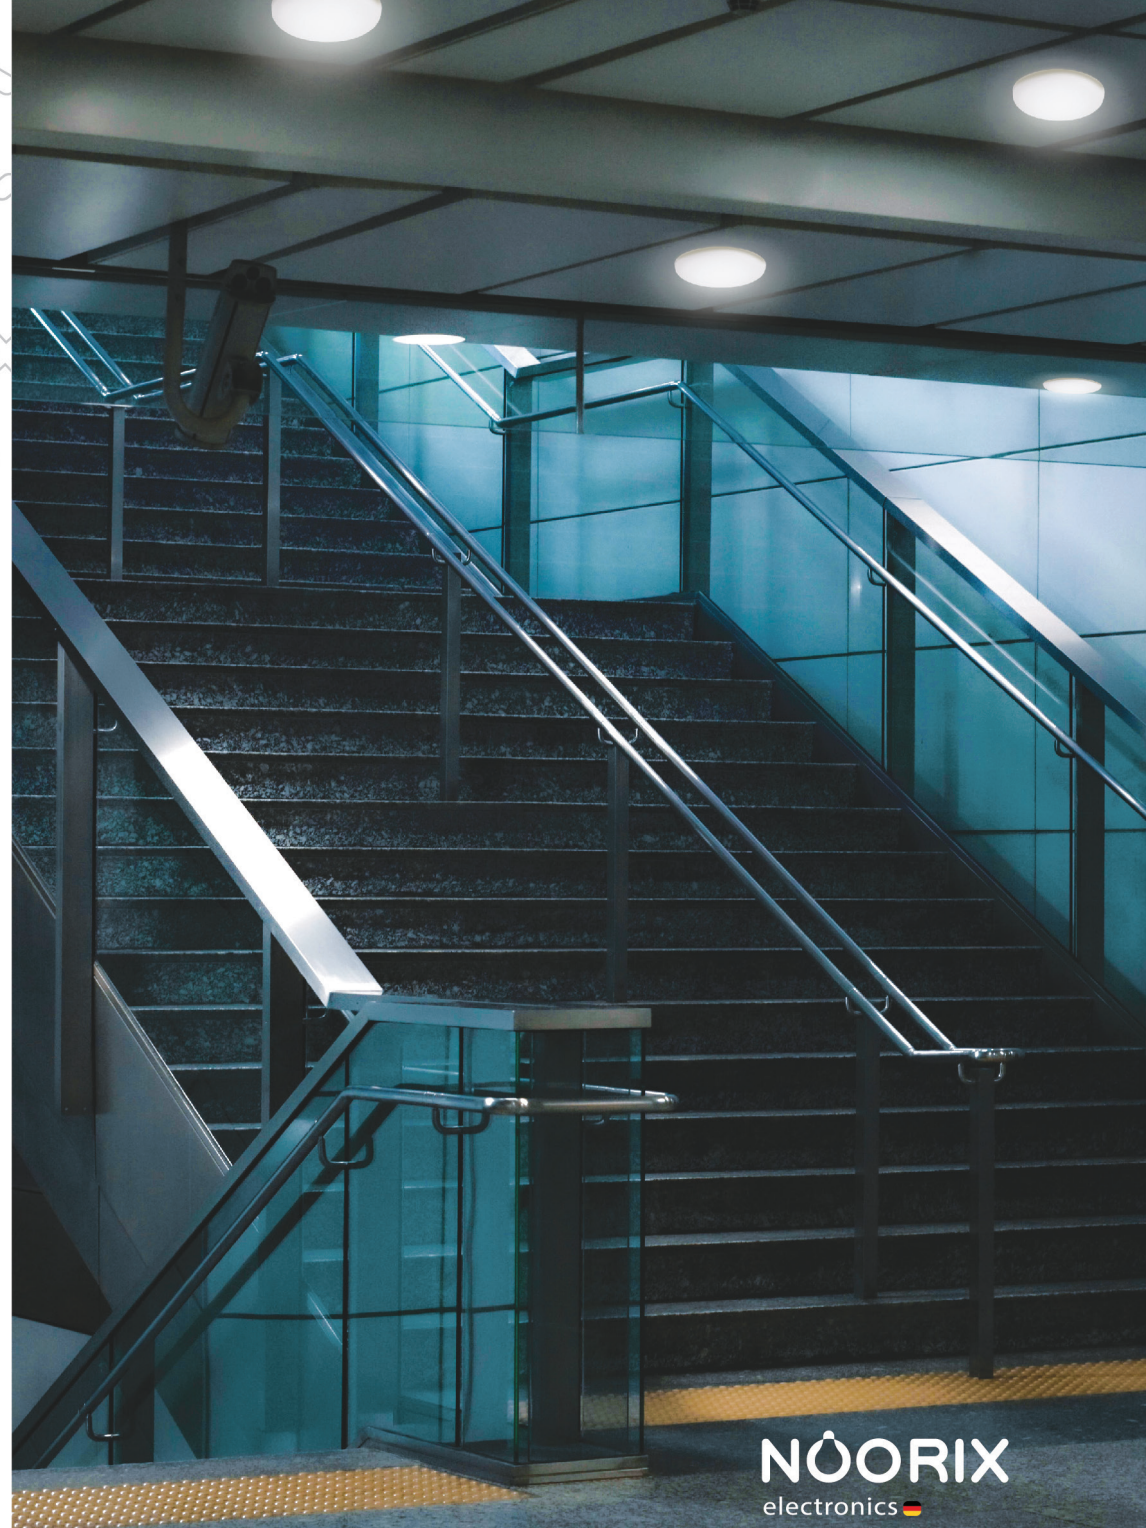


NOORIX
electronics 



85w | 100 mA



72w | 80 mA



60w | 60 mA

Panel Light 60*60

life span	25,000 h
frequency	50 Hz
angle of radiation	110°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color



Warm white



White




Natural White

Panel Light 60*60







LED liner




20w | 30 cm



40w | 60 cm



60w | 90 cm





80w | 120 cm

LED liner


life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>95
photometric code	865/358

Light color






10w | 30 cm



20w | 60 cm





30w | 90 cm

Cabinet light

Light color

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358



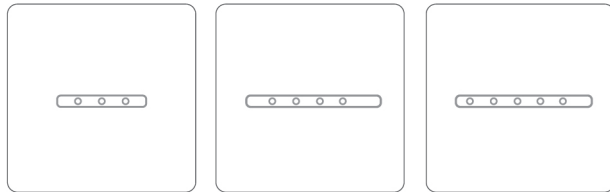

3 LED



4 LED

5 LED

LED Sensor Cabinet light

life span	30,000 h
frequency	50 Hz
angle of radiation	155 °
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.7
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/778

Light color

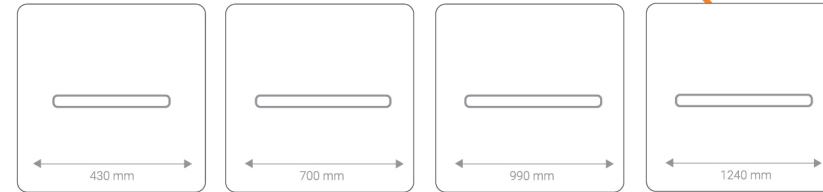

5w | 43 cm

8w | 70 cm


12w | 99 cm

18w | 124 cm

Sensor Cabinet light

life span	25,000 h
frequency	50 Hz
angle of radiation	240 °
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358


Light color




Cabinet light



NOORIX
electronics 



30w



40w

Track light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>95
photometric code	865/358

Light color




Track light






NOORIX
electronics


NOORIX
electronics



10w | 45 mA



30w | 130 mA



50w | 200 mA


Flood light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358


Light color




Flood Light



100w | 410 mA



150w | 600 mA




200w | 750 mA




Flood light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358


Light color




Flood Light



300w | 1100 mA



400w | 1450 mA



500w | 1450 mA

Flood light

life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 105
color rendering index	Ra>80
photometric code	865/358

Light color




Flood Light




NOORIX
electronics 






100w | 860 gr



150w | 1280 gr



200w | 1780 gr

UFO LED light


life span	25,000 h
frequency	50 Hz
angle of radiation	240°
nominal color	● 6500k / ● 4000k / ● 3000k
displacement coefficient	0.95
optical gain	Lm/W > 120
color rendering index	Ra>80
photometric code	865/358

Light color




UFO LED light






15w



20w



30w

Cylindrical LED light

life span	30,000 h
frequency	50 Hz
angle of radiation	180°
nominal color	840/578
displacement coefficient	WW/NW/WH
optical gain	105
color rendering index	>0.8
photometric code	Ra>80


Light color




Cylindrical LED light



Jet Light



5 w





10 w

Jet Light

life span	25,000 h
frequency	50 Hz
angle of radiation	25°
nominal color	865/358
displacement coefficient	AMBER/WW/NW/WH
optical gain	105
color rendering index	>0.9
photometric code	Ra>80

Light color



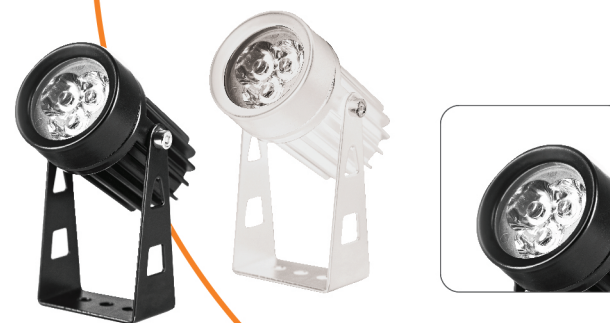

3w

Jet Light

life span	25,000 h
frequency	50 Hz
angle of radiation	45 °
nominal color	865/358
displacement coefficient	AMBER/WW/NW/WH
optical gain	Lm/W > 105
color rendering index	>0.9
photometric code	Ra>80

Light color



Warm white



White



Natural White



Amber


Jet Light



NOORIX
electronics 



Strip light



11w/per m

Strip light

life span	30,000 h
frequency	50 Hz
angle of radiation	120
nominal color	865/358
displacement coefficient	wh/ww/NW/Amber/Green/Red/Blue/Pink/Orange/RGB
optical gain	105
color rendering index	>0.8
photometric code	Ra>80

Light color

